




N series

182 N-type Bifacial Module 640W

 **12** years product workmanship warranty

 **30** years linear power output warranty

 **1%** 1st-year degradation
0.40% annual degradation

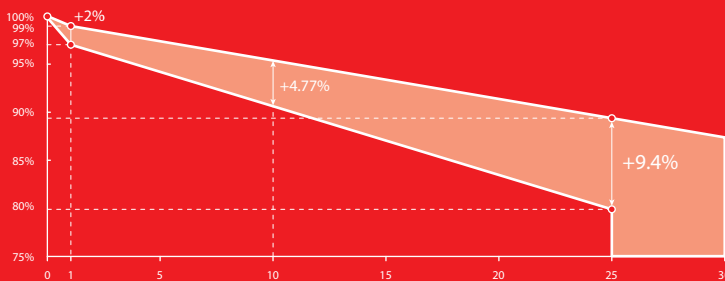

FEATURES AND BENEFITS



Topcon technology, higher power generation.



High density packaging, improving energy density.



Even cloudy or foggy days, better weak illumination response.



Zero LID, increase power generation.



Better temperature coefficient, more power generation.



Higher power output, lower bos cost.



Multiple weather, resistance tests, wider applicability.



Double-sided generation, powerfully energy boost.

LESSO 182 N-type Bifacial Module (78)



Power Range
625 W ~ 640W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.90 %

Structure Performance

Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	156pcs(6x26)
Module Dimension	2465x1134x30mm
Weight	33.5kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy / Polyurethane Composite Frame
Junction Box	IP68 rated
Cable	4mm ² , portrait 400mm (+) / 200mm (-) landscape 1400mm (+) / 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	576pcs

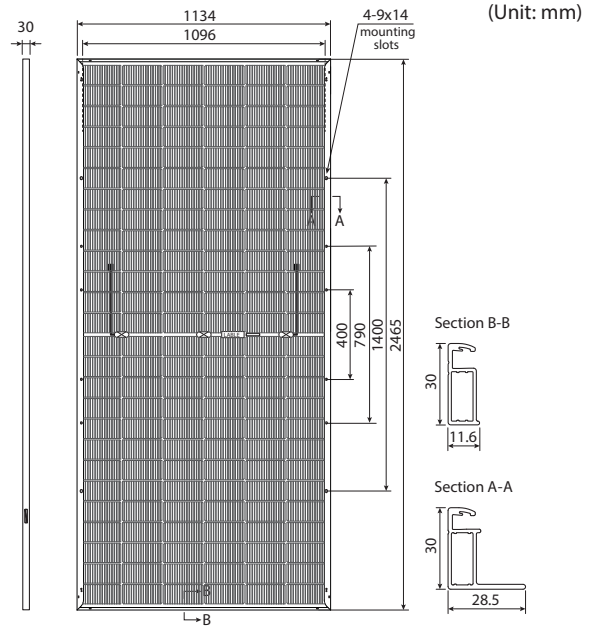


Electrical Performance Parameters

Model Type	625C(HBD)78(182)		630C(HBD)78(182)		635C(HBD)78(182)		640C(HBD)78(182)	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power P_{MAX} (W)	625	470	630	474	635	478	640	482
Max. Power Voltage V_{MP} (V)	46.24	43.43	46.37	43.57	46.50	43.71	46.63	43.85
Max. Power Current I_{MP} (A)	13.52	10.83	13.59	10.88	13.66	10.94	13.73	11.00
Open Circuit Voltage V_{OC} (V)	56.31	52.35	56.46	52.49	56.61	52.63	56.76	52.77
Short Circuit Current I_{SC} (A)	14.34	11.57	14.42	11.63	14.50	11.70	14.58	11.76
Module Efficiency (%)	22.36		22.54		22.72		22.90	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5 ; NMOT: Irradiance 800W/m², Ambient Temperature 20°C , Air Mass AM1.5 , Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (640C)

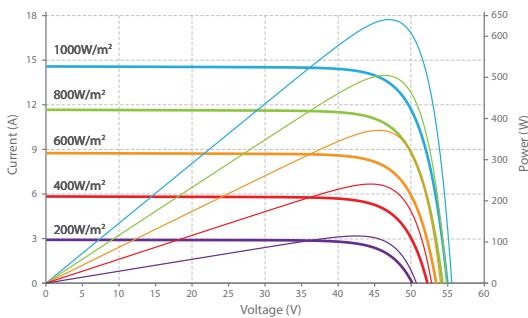

Bifacial Output-rearside Power Gain

Gain	Maximum Power P_{MAX} (W)		Module Efficiency (%)	
	5%	656	662	667
10%	688	693	699	704
	24.59	24.79	24.99	25.19
25%	781	788	794	800
	27.95	28.17	28.40	28.62

Temperature Characteristics

Nominal Module Operating Temperature	44±2	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40_+85
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

